
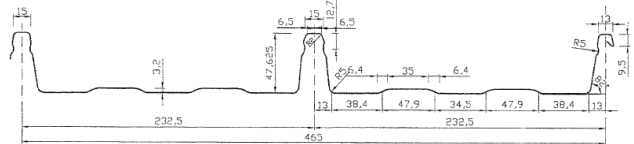


PRODUCT DATASHEET

RIB-ROOF 465 SLIDING STANDING SEAM PROFILE - STRAIGHT

PRODUCT ILLUSTRATIONS:

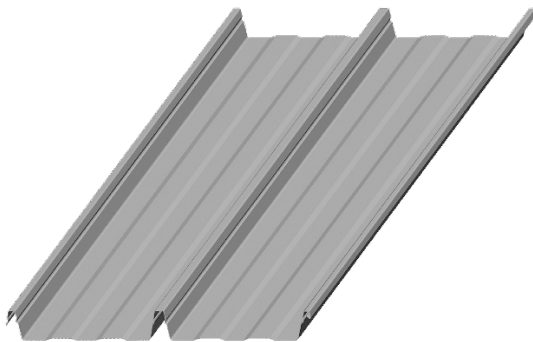

PRODUCT DESCRIPTION:

- Metal roofing system with construction width 465 mm
- Can be used from 1.5° roof pitch according to general technical authorisations for steel and aluminium
- Titanium-zinc, copper and special colours/surfaces are optional

ACCESSORIES:

- Sliding clips: various types as fixing elements, fixing screws
- (Ventilation)closure, profile filler, suspended profiles
- Solar brackets, snow guard brackets, tread support
- Fall arrest system: as rope system, single anchor point

TECHNICAL DETAILS:

Profile height h (mm)	Material acc. to EN 10346 (steel) or EN 573-3 (aluminium)	Material thickness (mm)	Weight, Construction width 465 mm (kg/m ²)	Material, corrosion protection EN 55634 (steel)	General technical authorisation number abZ
48	steel S320GD / S350GD	0.63	7.33	aluminium zinc coating AZ185	Z-14.1-345
48	steel S320GD / S350GD	0.63	7.24	Z275/ZM120 +colour coated 50µm	Z-14.1-345
48	aluminium EN AW 3004/3005/3105	0.70	2.71	blank and stucco-embossed	Z-14.1-346
48	aluminium EN AW 3004/3005/3105	0.80	3.09	blank and stucco-embossed	Z-14.1-346
48	aluminium EN AW 3004/3005/3105	0.90	3.48	blank and stucco-embossed	Z-14.1-346
48	aluminium EN AW 3004/3005/3105	1.00	3.87	blank and stucco-embossed	Z-14.1-346
48	aluminium EN AW 3004/3005/3105	0.70	2.86	smooth, colour coated ≥25µm	Z-14.1-346
48	aluminium EN AW 3004/3005/3105	0.80	3.25	smooth, colour coated ≥25µm	Z-14.1-346
48	aluminium EN AW 3004/3005/3105	0.90	3.64	smooth, colour coated ≥25µm	Z-14.1-346
48	aluminium EN AW 3004/3005/3105	1.00	4.03	smooth, colour coated ≥25µm	Z-14.1-346